

▼ 主要技术参数 Main Technical Parameters

使用温度 Operating Temperature: -40 ~ +85°C
 额定电压 Rating Voltage: 50V(AC/DC)
 额定电流 Rating Current: 0.5A/Pin
 接触电阻 Contact Resistance: 50mΩ Max
 绝缘阻抗 Insulation Impedance: 500MΩMin
 插拔耐久性 Durability: 20 Times/Min

▼ 材料 Material

主体 Housing: LCP Natural UL94V-0
 锁扣 Cover: PA Black UL94V-0
 端子 Terminal: Copper Alloy Plating: Au
 定位片 Stator: Copper Alloy Plating: Tin
 触点类型 Contact Type: Double Contact

▼ 注: 未插入FPC/FFC排线时禁止下压锁扣

Note: Do not close connector without FPC/FFC


▼ 环保标准 Environmental Protection Standard

符合欧盟 RoHS Reach 标准
 Comply with the EU RoHS, Reach



90601 Series

Units: mm

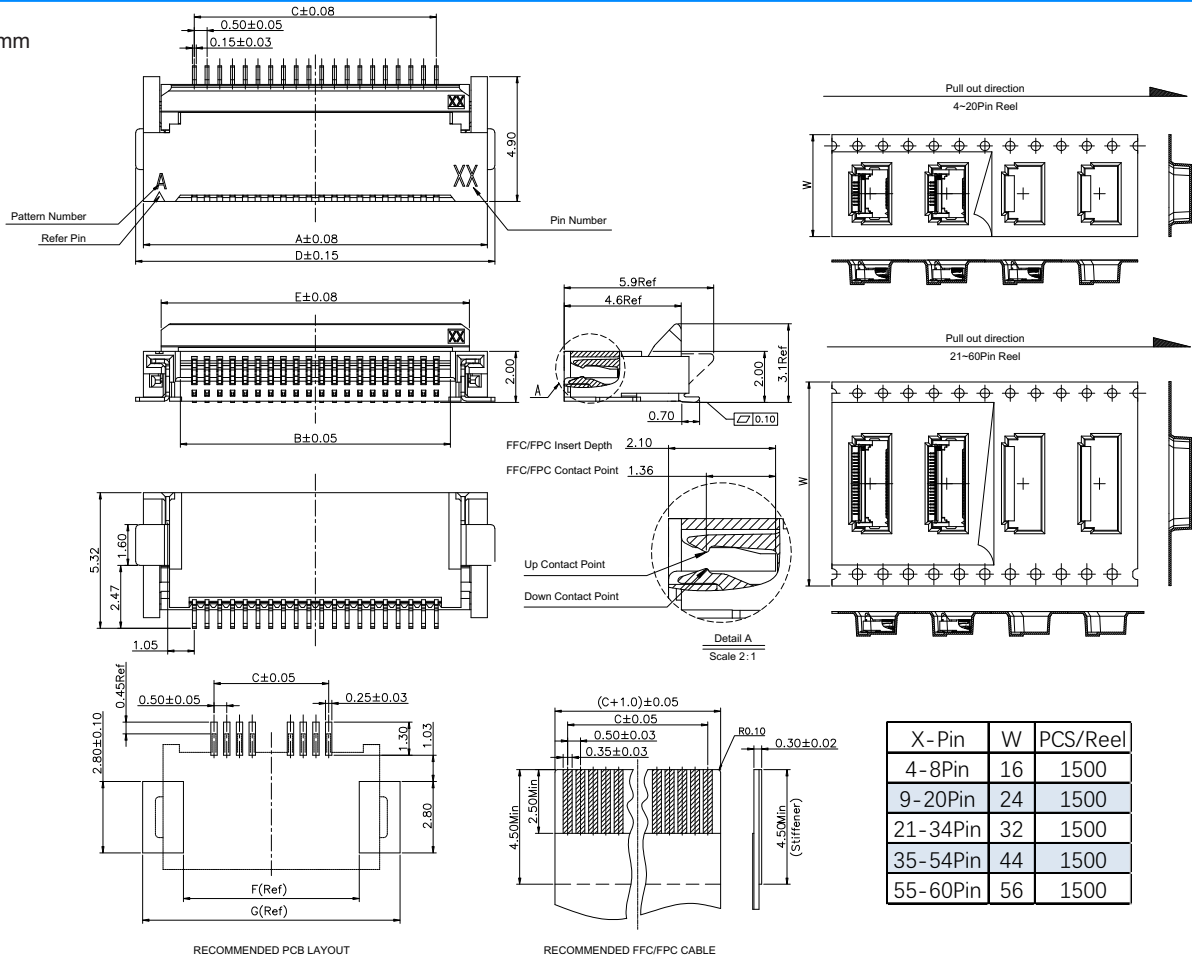

X-Pin	Part Number	A	B	C	D	E	F	G
4P	90601050004	5.50	2.55	1.50	6.10	4.10	3.90	7.10
6P	90601050006	6.50	3.55	2.50	7.10	5.10	4.90	8.10
8P	90601050008	7.50	4.55	3.50	8.10	6.10	5.90	9.10
9P	90601050009	8.00	5.05	4.00	8.60	6.60	6.40	9.60
10P	90601050010	8.50	5.55	4.50	9.10	7.10	6.90	10.10
12P	90601050012	9.50	6.55	5.50	10.10	8.10	7.90	11.10
14P	90601050014	10.50	7.55	6.50	11.10	9.10	8.90	12.10
15P	90601050015	11.00	8.05	7.00	11.60	9.60	9.40	12.60
16P	90601050016	11.50	8.55	7.50	12.10	10.10	9.90	13.10
18P	90601050018	12.50	9.55	8.50	13.10	11.10	10.90	14.10
20P	90601050020	13.50	10.55	9.50	14.10	12.10	11.90	15.10
22P	90601050022	14.50	11.55	10.50	15.10	13.10	12.90	16.10
24P	90601050024	15.50	12.55	11.50	16.10	14.10	13.90	17.10
26P	90601050026	16.50	13.55	12.50	17.10	15.10	14.90	18.10
28P	90601050028	17.50	14.55	13.50	18.10	16.10	15.90	19.10

X-Pin	Part Number	A	B	C	D	E	F	G
30P	90601050030	18.50	15.55	14.50	19.10	17.10	16.90	20.10
32P	90601050032	19.50	16.55	15.50	20.10	18.10	17.90	21.10
34P	90601050034	20.50	17.55	16.50	21.10	19.10	18.90	22.10
35P	90601050035	21.00	18.05	17.00	21.60	19.60	19.40	22.60
36P	90601050036	21.50	18.55	17.50	22.10	20.10	19.90	23.10
40P	90601050040	23.50	20.55	19.50	24.10	22.10	21.90	25.10
41P	90601050041	24.00	21.05	20.00	24.60	22.60	22.40	25.60
42P	90601050042	24.50	21.55	20.50	25.10	23.10	22.90	26.10
45P	90601050045	26.00	23.05	22.00	26.60	24.60	24.40	27.60
50P	90601050050	28.50	25.55	24.50	29.10	27.10	26.90	30.10
51P	90601050051	29.00	26.05	25.00	29.60	27.60	27.40	30.60
52P	90601050052	29.50	26.55	25.50	30.10	28.10	27.90	31.10
54P	90601050054	30.50	27.55	26.50	31.10	29.10	28.90	32.10
55P	90601050055	31.00	28.05	27.00	31.60	29.60	29.40	32.60
60P	90601050060	33.50	30.55	29.50	34.10	32.10	31.90	35.10