

▼ 主要技术参数 Main Technical Parameters

使用温度 Operating Temperature: -40 ~ +85°C
 额定电压 Rating Voltage: 50V(AC/DC)
 额定电流 Rating Current: 0.5A/Pin
 接触电阻 Contact Resistance: 100mΩ Max
 绝缘阻抗 Insulation Impedance: 500MΩMin
 插拔耐久性 Durability: 20 Times/Min

▼ 材料 Material

主体 Housing: LCP Natural UL94V-0
 锁扣 Cover: PA Black UL94V-0
 端子 Terminal: Copper Alloy Plating: Au
 定位片 Stator: Copper Alloy Plating: Tin
 触点类型 Contact Type: Double Contact

▼ 注: 未插入FPC/FFC排线时禁止下压锁扣



Note: Do not close connector without FPC/FFC

▼ 环保标准 Environmental Protection Standard

符合欧盟 RoHS Reach 标准
 Comply with the EU RoHS, Reach



Units: mm

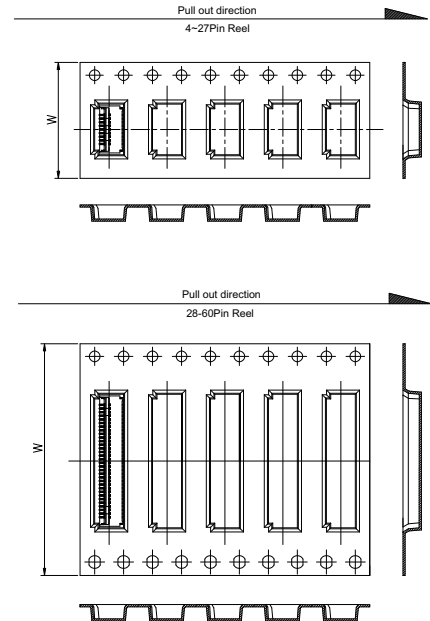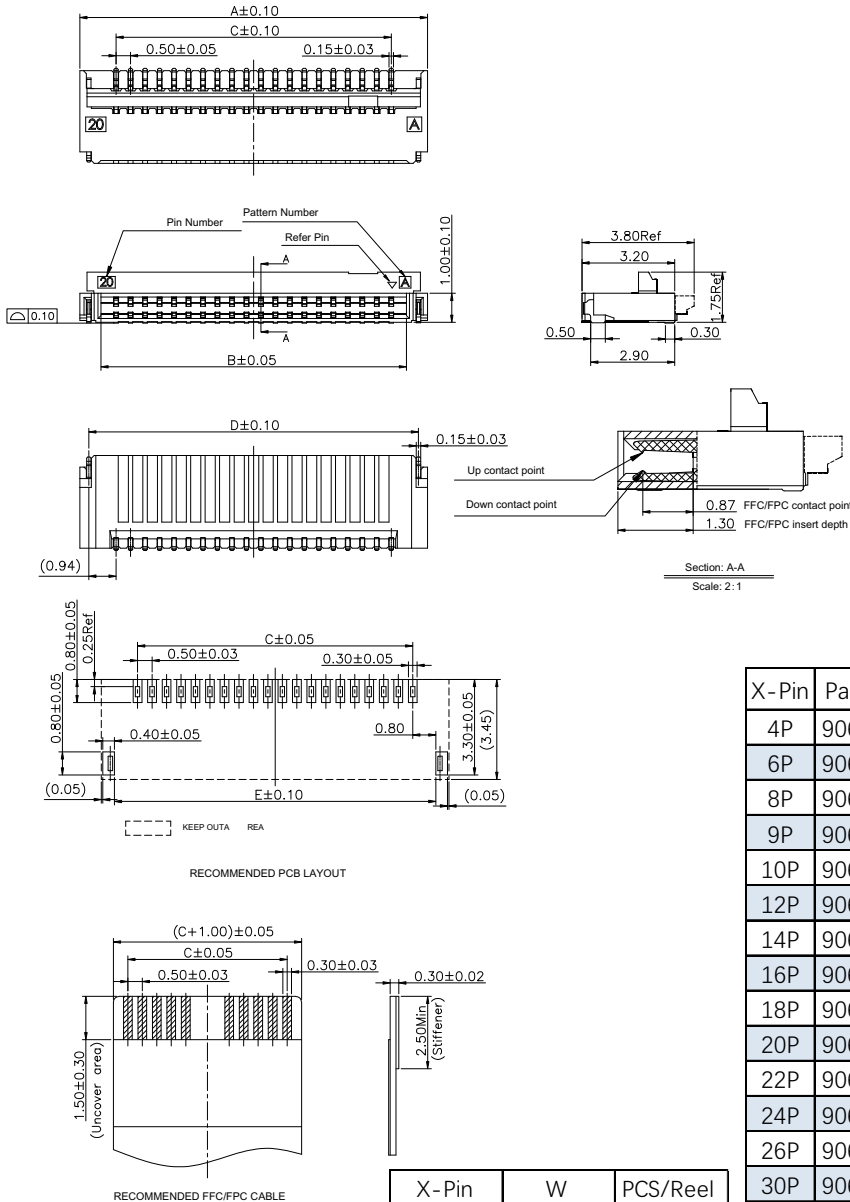

| X-Pin | Part Number | A | B | C | D | E |
|-------|-------------|-------|-------|-------|-------|-------|
| 4P | 90607050004 | 4.00 | 2.55 | 1.50 | 3.38 | 3.10 |
| 6P | 90607050006 | 5.00 | 3.55 | 2.50 | 4.38 | 4.10 |
| 8P | 90607050008 | 6.00 | 4.55 | 3.50 | 5.38 | 5.10 |
| 9P | 90607050009 | 6.50 | 5.05 | 4.00 | 4 | 5.60 |
| 10P | 90607050010 | 7.00 | 5.55 | 4.50 | 6.38 | 6.10 |
| 12P | 90607050012 | 8.00 | 6.55 | 5.50 | 7.38 | 7.10 |
| 14P | 90607050014 | 9.00 | 7.55 | 6.50 | 8.38 | 8.10 |
| 16P | 90607050016 | 10.00 | 8.55 | 7.50 | 9.38 | 9.10 |
| 18P | 90607050018 | 11.00 | 9.55 | 8.50 | 10.38 | 10.10 |
| 20P | 90607050020 | 12.00 | 10.55 | 9.50 | 11.38 | 11.10 |
| 22P | 90607050020 | 13.00 | 11.55 | 10.50 | 12.38 | 12.10 |
| 24P | 90607050024 | 14.00 | 12.55 | 11.50 | 13.38 | 13.10 |
| 26P | 90607050026 | 15.00 | 13.55 | 12.50 | 14.38 | 14.10 |
| 30P | 90607050030 | 17.00 | 15.55 | 14.50 | 16.38 | 16.10 |
| 34P | 90607050034 | 19.00 | 17.55 | 16.50 | 18.38 | 18.10 |
| 40P | 90607050040 | 22.00 | 20.55 | 19.50 | 21.38 | 21.10 |
| 42P | 90607050042 | 23.00 | 21.55 | 20.50 | 22.38 | 22.10 |
| 50P | 90607050050 | 27.00 | 25.55 | 24.50 | 26.38 | 26.10 |

| X-Pin | W | PCS/Reel |
|----------|----|----------|
| 4-11Pin | 16 | 3000 |
| 12-27Pin | 24 | 3000 |
| 28-39Pin | 32 | 3000 |
| 40-60Pin | 44 | 3000 |