

Rtench 0.3mm间距 高度0.9mm双面接触后锁式FPC/FFC 连接器

Pitch0.3mm H=0.9mm Dual Contact Side FPC/FFC Connector

▼ 主要技术参数 Main Technical Parameters

使用温度 Operating Temperature: -40 ~ +85°C
 额定电压 Rating Voltage: 30V(AC/DC)
 额定电流 Rating Current: 0.2A/Pin
 接触电阻 Contact Resistance: 100mΩ Max
 绝缘阻抗 Insulation Impedance: 50MΩMin
 插拔耐久性 Durability: 20 Times/Min

▼ 材料 Material

主体 Housing: LCP Natural UL94V-0
 锁扣 Cover: PA Black UL94V-0
 端子 Terminal: Copper Alloy Plating: Au
 定位片 Stator: Copper Alloy Plating: Tin
 触点类型 Contact Type: Double Contact

▼ 注: 未插入FPC/FFC排线时禁止下压锁扣


Note: Do not close connector without FPC/FFC

▼ 环保标准 Environmental Protection Standard

符合欧盟 RoHS Reach 标准
 Comply with the EU RoHS, Reach



Units: mm

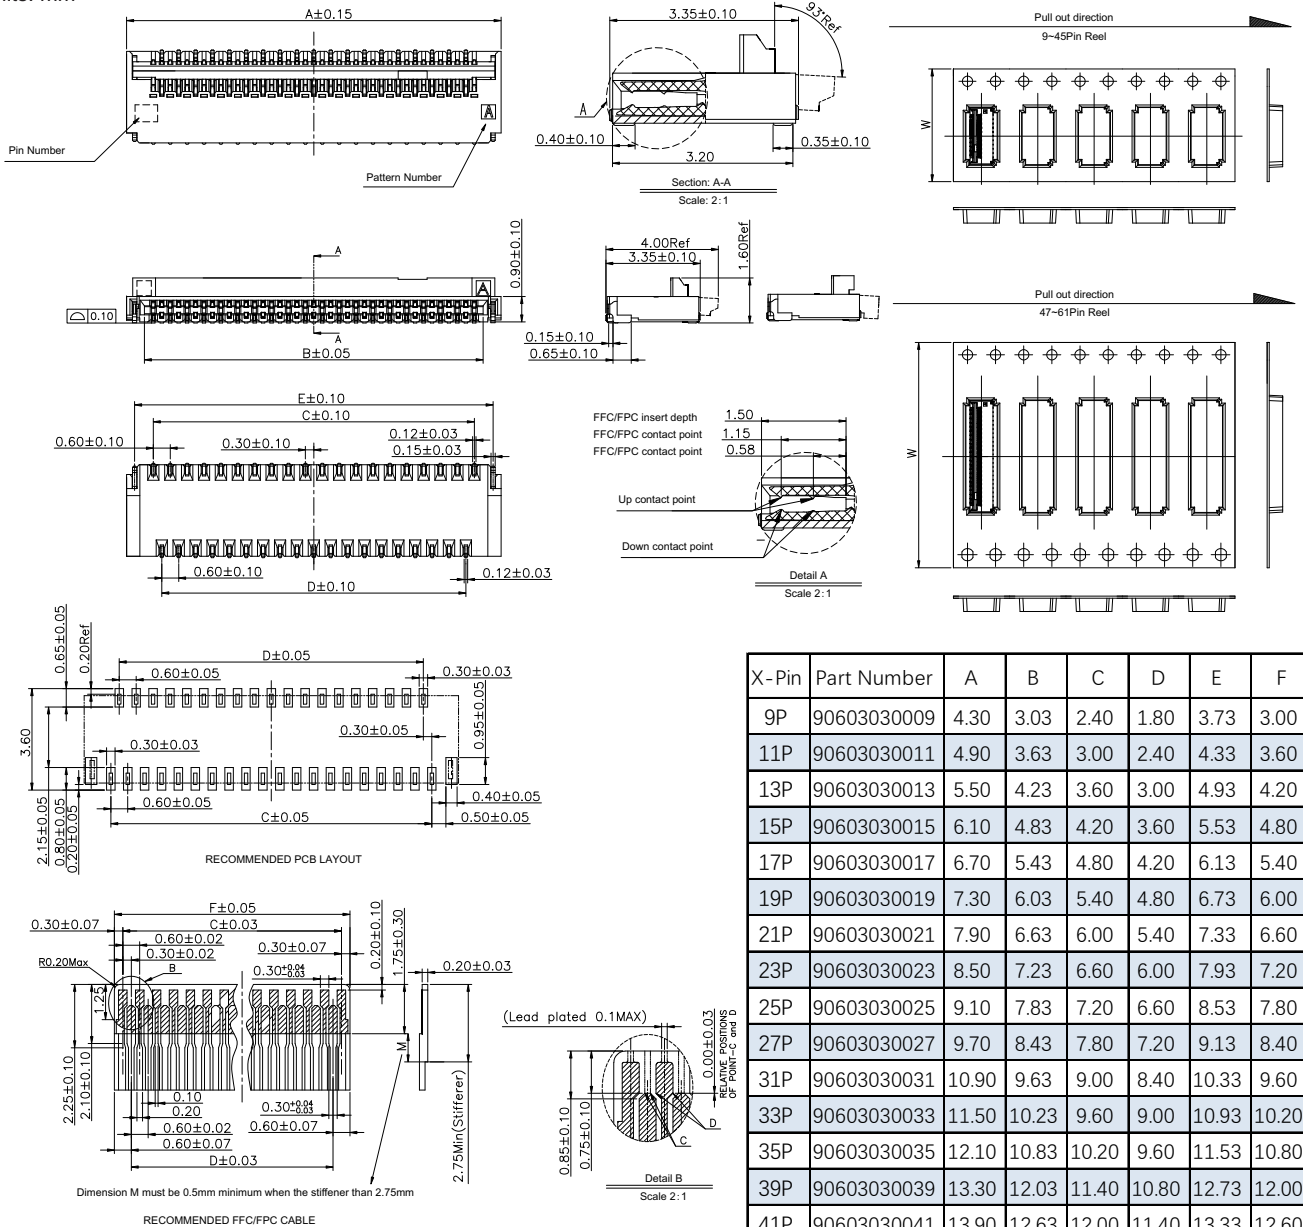

X-Pin	Part Number	A	B	C	D	E	F
9P	90603030009	4.30	3.03	2.40	1.80	3.73	3.00
11P	90603030011	4.90	3.63	3.00	2.40	4.33	3.60
13P	90603030013	5.50	4.23	3.60	3.00	4.93	4.20
15P	90603030015	6.10	4.83	4.20	3.60	5.53	4.80
17P	90603030017	6.70	5.43	4.80	4.20	6.13	5.40
19P	90603030019	7.30	6.03	5.40	4.80	6.73	6.00
21P	90603030021	7.90	6.63	6.00	5.40	7.33	6.60
23P	90603030023	8.50	7.23	6.60	6.00	7.93	7.20
25P	90603030025	9.10	7.83	7.20	6.60	8.53	7.80
27P	90603030027	9.70	8.43	7.80	7.20	9.13	8.40
31P	90603030031	10.90	9.63	9.00	8.40	10.33	9.60
33P	90603030033	11.50	10.23	9.60	9.00	10.93	10.20
35P	90603030035	12.10	10.83	10.20	9.60	11.53	10.80
39P	90603030039	13.30	12.03	11.40	10.80	12.73	12.00
41P	90603030041	13.90	12.63	12.00	11.40	13.33	12.60
45P	90603030045	15.10	13.83	13.20	12.60	14.53	13.80
51P	90603030051	16.90	15.63	15.00	14.40	16.33	15.60
57P	90603030057	18.70	17.43	16.80	16.20	18.13	17.40
61P	90603030061	19.90	18.63	18.00	17.40	19.33	18.60

X-Pin	W	PCS/Reel
9-19Pin	16	3000
21-45Pin	24	3000
47-61Pin	32	3000