

▼ 主要技术参数 Main Technical Parameters

使用温度 Operating Temperature: -40 ~ +85°C
 额定电压 Rating Voltage: 50V(AC/DC)
 额定电流 Rating Current: 0.5A/PIN
 接触电阻 Contact Resistance: 50mΩ Max
 绝缘阻抗 Insulation Impedance: 500MΩMin
 插拔耐久性 Durability: 20 Times/Min

▼ 材料 Material

主体 Housing: LCP Natural UL94V-0
 锁扣 Cover: PA Black UL94V-0
 端子 Terminal: Copper Alloy Plating: Au
 定位片 Stator: Copper Alloy Plating: Tin
 触点类型 Contact Type: Double Contact

▼ 注: 未插入FFC/FPC排线时禁止下压锁扣

Note: Do not close connector without FPC/FFC


▼ 环保标准 Environmental Protection Standard

符合欧盟 RoHS Reach 标准
 Comply with the EU RoHS, Reach



90604 Series

Units: mm

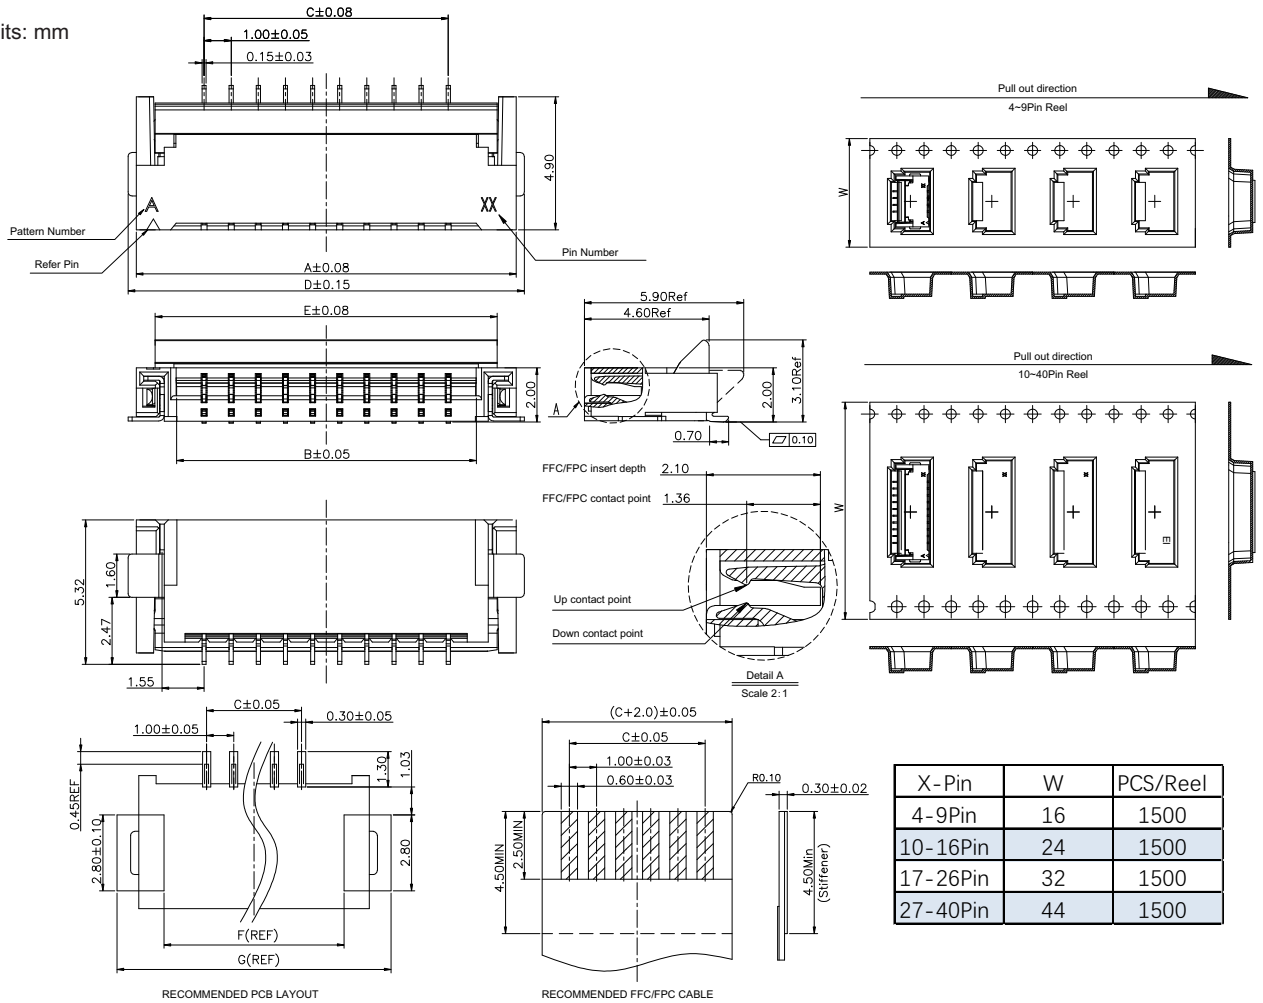

X-Pin	W	PCS/Reel
4-9Pin	16	1500
10-16Pin	24	1500
17-26Pin	32	1500
27-40Pin	44	1500

X-Pin	Part Number	A	B	C	D	E	F	G
4P	90604100004	8.00	5.05	3.00	8.60	6.60	6.40	9.60
5P	90604100005	9.00	6.05	4.00	9.60	7.60	7.40	10.60
6P	90604100006	10.00	7.05	5.00	10.60	8.60	8.40	11.60
8P	90604100008	12.00	9.05	7.00	12.60	10.60	10.40	13.60
10P	90604100010	14.00	11.05	9.00	14.60	12.60	12.40	15.60
12P	90604100012	16.00	13.05	11.00	16.60	14.60	14.40	17.60
13P	90604100013	17.00	14.05	12.00	17.60	15.60	15.40	18.60
14P	90604100014	18.00	15.05	13.00	18.60	16.60	16.40	19.60
15P	90604100015	19.00	16.05	14.00	19.60	17.60	17.40	20.60
16P	90604100016	20.00	17.05	15.00	20.60	18.60	18.40	21.60
18P	90604100018	22.00	19.05	17.00	22.60	20.60	20.40	23.60
20P	90604100020	24.00	21.05	19.00	24.60	22.60	22.40	25.60

X-Pin	Part Number	A	B	A	D	E	F	G
24P	90604100024	28.00	25.05	23.00	28.60	26.60	26.40	29.60
26P	90604100026	30.00	27.05	25.00	30.60	28.60	28.40	31.60
27P	90604100027	31.00	28.05	26.00	31.60	29.60	29.40	32.60
28P	90604100028	32.00	29.05	27.00	32.60	30.60	30.40	33.60
30P	90604100030	34.00	31.05	29.00	34.60	32.60	32.40	35.60
36P	90604100036	40.00	37.05	35.00	40.60	38.60	38.40	41.60
40P	90604100040	44.00	41.05	39.00	44.60	42.60	42.40	45.60